ASSEMBLY INSTRUCTIONS

MODEL#:RL1023C

TE: Only the technical personnel can be allowto fix and maintain.

IMPORTANT!

ake sure that the power is switch off at the electricity mains supply before ommencing work.

XING INSTRUCTIONS

Wiredrawing lampshade (18) will be fixed on the Main body pipe(17) above, it fixed rnhood (16), and screw on the crystal rings (7).
Take out screw (4) and rotate it into crystal lifting ring (7) (at least 6mm) and en tightened with washer (6) &hexagonal nut(5).
Rotate the one nut of screw(4) till close to the first nut and then rotate screw into batten(13). Make sure screw (4) should go through batten(13).
Use outlet box screws (14) to fix batten (13) on outlet box (1).
Take out ring cover(9) from crystal lifting ring (7) and then let the canopy (8) rough crystal lifting ring (7). Adjust the crystal lifting ring to a certain ight.
Tighten the nut to fix on batten (13) in the right position.
Ground Connection (See picture 1): there are one tapping hole & two dimples. nd the supply ground wire (2) on the green ground screw (15) and then put it into pping hole. Connect the fixture ground wire (3) with supply ground wire (2) by nnecting terminal (12). Caution: DO NOT connect ground wire with supply power re.
Connect fixture supply wire (10) with power supply wire (11). Caution: Remember distinguish the positive and negative charges. (See picture 2)
Push canopy (8) up to the ceiling.
Attach ring cover (9) on crystal lifting ring and fix canopy (8) as well.
Put shade (18) on holder and tightened with out ring
Screw bulb in the holder.

EPLACEMENT BULB

not exceed the maximum wattage.
ght bulbs recommended: RL1023C -E12 -3 x 40W Max, Type B.

LEANING CARE

ean with a soft dry cloth.

AFETY INFORMATION

Lamp used must in rated voltage, and do not touch the bulb with bare hands . ways switch off the electricity supply and allow to cool for 10 minutes before anging the light bulbs.

If the external cables have been demaged, Pls change or repair by manufacturer or rvice agency or professional electrician, In order to avoid the danger.

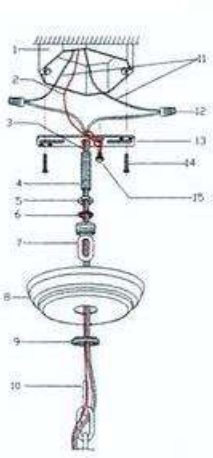



B



A